


Type	Capacity (KVA)	Power input (KW)		Efficiency				Electric Parameters										Weight Kg	Moment of inertia kg.m2
		Cosφ=0.8	Cosφ=1	Cosφ=0.8		Cosφ=1		Ra W	Xd %	Xq %	X'd %	X''d %	X''q %	Tdo %	T'd ms	T''d ms	Ta ms		
				3/4	4/4	3/4	4/4												
1500 rev/min - 4pole																			
GS3221-4A0	35	33/4	40	35/8	83/6	89/1	87/4	0/2780	257	102/0	20/7	12/8	13/1	0/81	65/3	2/2	4/7	300	0/6
GS3222-4A0	45	41/7	50/3	88/0	96/3	90/8	89/5	0/1710	248	97/7	17/6	11/1	11/6	0/91	64/8	2/1	5/1	330	0/72
GS3223-4A0	60	54/2	65/7	89/8	88/5	92/3	91/3	0/1000	240	94/2	15/3	9/9	10/4	1/01	64/3	2/0	5/9	380	0/9
GS3224-4A0	80	71/2	86/6	90/9	89/8	93/2	92/4	0/0630	232	90/9	13/5	8/9	9/5	1/10	63/9	2/0	6/3	450	1/2
GS3251-4A0	100	88/1	107	91/4	90/8	93/5	93/1	0/0430	251	97/7	13/9	8/6	9/3	1/74	96/3	4/3	7/0	550	1/9
GS3252-4A0	120	106	129	91/2	90/5	93/5	93/1	0/0340	251	97/7	13/6	8/5	9/1	1/45	98/7	3/5	7/21	595	1/9
GS3281-4A0	150	131	160	92/2	91/4	94/1	93/4	0/0280	361	141/0	21/3	12/9	13/6	2/14	127	4/8	10/6	650	2/7
GS3282-4A0	175	153	187	92/1	91/3	94/2	93/5	0/0230	347	135/0	20/1	12/2	12/9	1/79	104	4/4	10/3	680	2/8
GS3283-4A0	200	174	213	92/7	92/0	94/6	94/1	0/0180	338	131/0	18/5	11/3	12/1	1/88	103	4/3	10/8	750	3/2
GS3284-4A0	240	207	254	93/3	92/6	95/0	94/5	0/0140	341	132/0	17/5	10/8	11/7	2/00	103	4/3	11/4	850	3/9
GS3311-4A0	250	217	265	93/0	92/3	94/7	94/2	0/0140	351	137/0	21/8	13/3	14/0	2/12	131	10/1	12/9	950	4/8
GS3312-4A0	300	259	318	93/2	92/5	94/9	94/4	0/0116	336	131/0	19/7	12/2	13/0	2/23	131	9/9	12/0	980	5/2
GS3313-4A0	340	292	359	93/6	93/0	95/3	94/8	0/0094	345	134/0	19/4	12/1	12/9	2/32	131	9/8	13/0	1060	5/6
GS3314-4A0	380	326	400	93/9	93/3	95/5	95/0	0/0081	346	135/0	18/6	11/7	12/6	2/42	130	9/7	13/2	1170	6/2
GS3315-4A0	420	358	440	94/4	93/8	95/8	95/4	0/0064	336	130/0	17/3	10/9	11/9	2/52	129	9/6	14/1	1250	6/7
GS3351-4A0	450	388	476	93/8	92/9	95/2	94/5	0/0068	449	175/0	26/6	16/2	17/2	3/51	208	14/1	18/2	1470	8/8
GS3352-4A0	500	426	525	94/5	93/8	95/8	95/3	0/0057	446	173/0	25/2	15/5	16/5	3/66	207	13/9	18/6	1570	8/8
GS3353-4A0	560	475	585	94/9	94/3	96/1	95/7	0/0046	434	169/0	23/5	14/5	15/6	3/81	207	13/7	19/4	1640	10/0
GS3401-4A0	660	570	699	93/4	92/7	94/9	94/4	0/0039	447	174/0	26	15/6	16/5	3/53	205	17/4	21/1	2000	18/0
GS3402-4A0	800	685	843	94/0	93/4	95/4	94/9	0/0030	466	181/0	25/4	15/4	16/5	4/75	259	17/4	22/4	2240	22/0
GS3403-4A0	960	815	1005	94/7	94/2	95/9	95/5	0/0021	463	179/0	23/7	14/5	15/7	5/03	258	17/1	24/9	2420	26/0
GS3404-4A0	1150	970	1198	95/2	94/8	96/3	96/0	0/0051	450	174/0	21/4	13/2	14/6	5/39	256	16/6	26/3	2820	32/0
GS3405-4A0	1250	1056	1303	95/2	94/7	96/3	95/9	0/0015	519	200/0	24/2	15/1	16/6	5/48	256	16/6	28/0	2940	33/0
1000 rev/min - 6pole																			
GS3311-6A0	190	166	203	92/3	91/3	94/4	93/7	0/0219	218	86/9	18/9	11/7	11/9	1/38	120	5/9	9/8	1050	6/2
GS3312-6A0	210	183	223	92/7	91/9	94/8	94/1	0/0181	218	86/6	18/3	11/4	11/6	1/42	120	5/8	10/5	1100	6/8
GS3313-6A0	235	203	248	93/3	92/2	95/2	94/7	0/0136	215	85/5	17/6	11/0	11/2	1/46	120	5/8	12/0	1150	7/7
GS3314-6A0	260	224	274	93/4	92/6	95/2	94/7	0/0130	213	84/7	16/8	10/6	10/8	1/52	120	5/7	11/1	1200	8/6
GS3351-6A0	330	287	351	93/1	92/1	94/9	94/1	0/0107	285	113/0	21/9	14/2	14/6	2/08	160	9/5	13/9	1400	12/0
GS3352-6A0	376	320	391	93/6	92/6	95/3	94/6	0/0087	280	111/0	20/6	13/4	14	2/16	159	9/4	14/6	1500	13/0
GS3353-6A0	410	352	432	93/9	93/1	95/5	94/9	0/0071	263	104/0	18/6	12/2	12/8	2/24	159	9/3	14/7	1600	15/0
GS3401-6A0	450	395	482	92/4	90/7	94/3	93/3	0/0081	253	140/0	25/6	16/8	17/5	3/23	235	15/5	15/7	1900	20/0
GS3402-6A0	510	443	542	93/1	91/7	94/9	94/1	0/0061	322	127/0	22/1	14/6	15/4	3/40	233	15/2	15/9	2100	24/0
GS3403-6A0	580	501	614	93/6	92/4	94/5	94/5	0/0049	324	127/0	21/3	14/1	14/9	3/51	230	15/0	16/8	2200	26/0
GS3404-6A0	640	551	676	93/8	92/7	95/4	94/7	0/0043	324	127/0	20/6	13/8	2/3	3/63	231	14/8	17/2	2300	29/0
GS3405-6A0	720	615	756	94/4	93/5	95/8	95/3	0/0033	314	123/0	19/0	12/7	1/9	3/75	228	14/6	18/5	2600	33/0
GS3406-6A0	820	698	859	94/7	94/0	96/0	95/5	0/0027	309	121/0	18/1	12/2	13/2	3/88	228	14/4	19/1	2800	37/0
GS3407-6A0	910	770	948	95/0	94/5	96/4	96/0	0/0020	277	108/0	15/5	10/5	11/5	4/02	226	14/2	19/8	3100	40/0



ژنراتور فشار ضعیف

ابعاد نصب

ولتاژ: ۴۰۰ ولت، فرکانس: ۵۰ هرتز، IMB3، IC01، IP23

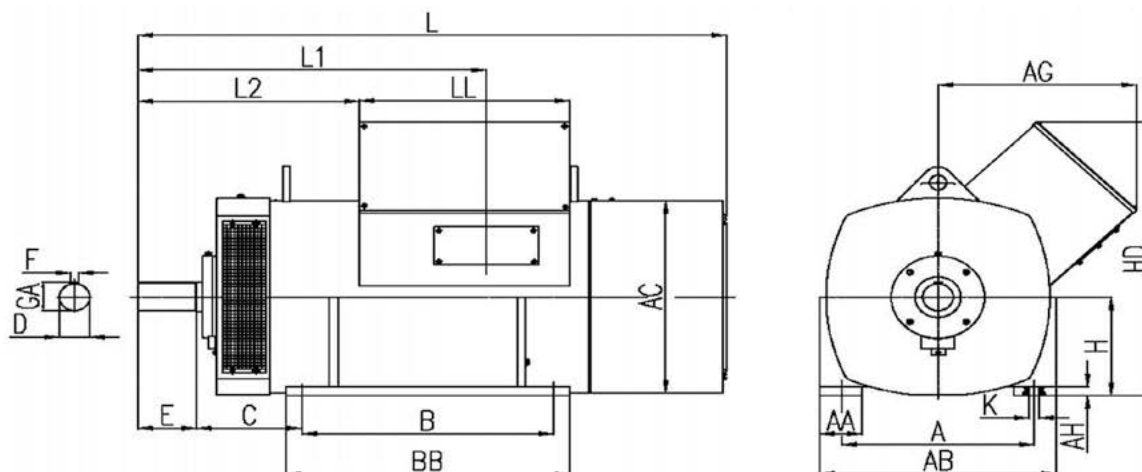

Frame Size	Capacity (KVA)	No. of Poles	H	A	B	C	D	E	F	GA	K	AA	AB	AC	BB	AG	AH	HD	L	L1	L2	LL
225	35	4	225	356	311	149	55	110	16	59	19	100	450	430	380	355	18	560	807	490	235	325
225	45	4	225	356	311	149	55	110	16	59	19	100	450	430	380	355	18	560	839	522	267	325
225	60	4	225	356	356	149	60	140	18	64	19	100	450	430	425	355	18	560	917	600	345	325
225	80	4	225	356	356	149	60	140	18	64	19	100	450	430	425	635	18	590	987	670	318	422
250	100	4	250	406	406	254	75	140	20	80	24	100	500	480	490	380	22	630	1157	754	402	500
250	120	4	250	406	406	254	75	140	20	80	24	100	500	480	490	380	22	630	1157	754	402	500
280	150	4	280	457	457	254	85	170	22	90	24	120	560	540	540	510	27	790	1293	770	434	530
280	175	4	280	457	457	254	85	170	22	90	24	120	560	540	540	510	27	790	1293	770	434	530
280	200	4	280	457	457	254	85	170	22	90	24	120	560	540	540	510	27	790	1293	770	434	530
280	240	4	280	457	457	254	85	170	22	90	24	120	560	540	540	510	27	790	1409	885	550	530
315	250	4	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1347	846	444	600
315	300	4	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1347	846	444	600
315	340	4	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1347	846	444	600
315	380	4	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1457	956	554	600
315	420	4	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1457	956	554	600
355	450	4	355	610	560	280	100	170	28	106	28	140	750	680	660	565	27	920	1459	928	526	600
355	500	4	355	610	560	280	100	170	28	106	28	140	750	680	660	565	27	920	1559	1026	626	600
355	560	4	355	610	560	280	100	170	28	106	28	140	750	680	660	565	27	920	1559	1026	626	600
400	660	4	400	686	630	355	110	170	28	116	35	150	845	780	750	625	35	1025	1736	977	577	600
400	800	4	400	686	630	355	110	170	28	116	35	150	845	780	750	720	35	1120	1800	1041	641	600
400	960	4	400	686	710	355	110	210	28	116	35	150	845	780	830	750	35	1150	1925	1092	616	750
400	1150	4	400	686	800	355	110	210	28	116	35	150	845	780	975	750	35	1150	2065	1232	756	750
400	1250	4	400	686	900	375	110	210	28	116	35	150	845	780	1015	750	35	1150	2105	1272	796	750
315	190	6	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1347	846	444	600
315	210	6	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1347	846	444	600
315	235	6	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1457	956	554	600
315	260	6	315	508	508	254	95	170	25	100	28	140	650	610	600	545	27	860	1457	956	554	600
355	330	6	355	610	560	280	100	170	28	106	28	140	750	680	660	565	27	920	1459	928	526	600
355	376	6	355	610	560	280	100	170	28	106	28	140	750	680	660	565	27	920	1559	1026	626	600
355	410	6	355	610	560	280	100	170	28	106	28	140	750	680	660	565	27	920	1559	1026	626	600
400	450	6	400	686	560	355	100	170	28	106	35	150	845	780	680	625	35	1025	1713	898	501	600
400	510	6	400	686	630	355	100	170	28	106	35	150	845	780	750	625	35	1025	1813	998	601	600
400	580	6	400	686	630	355	100	170	28	106	35	150	845	780	750	720	35	1120	1813	998	601	600
400	640	6	400	686	630	355	100	170	28	106	35	150	845	780	750	720	35	1120	1863	1048	651	600
400	720	6	400	686	710	355	110	210	28	116	35	150	845	780	830	750	35	1150	1978	1145	769	750
400	820	6	400	686	800	355	110	210	28	116	35	150	845	780	975	750	35	1150	2118	1285	809	750
400	910	6	400	686	900	375	110	210	28	116	35	150	845	780	1015	750	35	1150	2158	1325	849	750

کلیه ابعاد بر حسب میلیمتر است.
www.jemcomotor.ir